


ABSORPTION COOLING SYSTEM

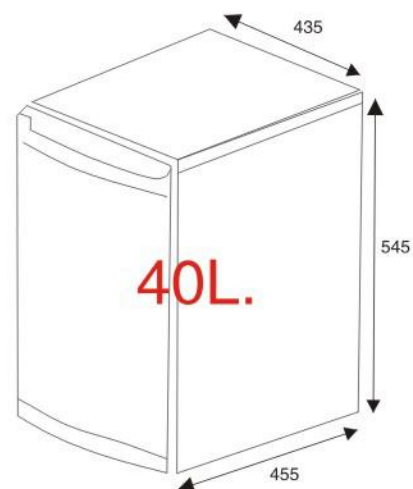

XC-38 Details

Cooling capacity (Litres)	40
Out size (mm)(W×D×H)	435×455×545
Power (Watt)	60
Voltage/frequency (V)(Hz)	220-240/50-60
Energy consumption (kwh/24h)	0.8
Refrigerant	NH3
Net weight (kg)	15
Loading capacity (20/40/40HQ)	188/376/400
Color	Optional
Lock	Optional
Door	Glass door/Solid door


XC-38

- 吸收扩散式制冷原理
- 无压缩机, 无氟里昂, 无机械运动部件, 超静音运行
- 自动除霜, LED内置照明
- 全封闭设计, 终生无需添加制冷剂
- 运输方便, 不怕倾斜, 倒置
- 低电耗, 支持多种电压(直流12V, 24V, 交流110V, 220V等)

- Absorption style refrigeration technology
- No compressor, no freon, no moving parts, complete silent
- Auto defrost, interior LED light
- Totally enclosed design without need to add refrigerant for whole life
- Easy transportation, no concern for slanting or placing upside down.
- Low power consumption, supporting multi-voltage (DC 12V, 24V, AC 110V, 220V etc)



XC-28

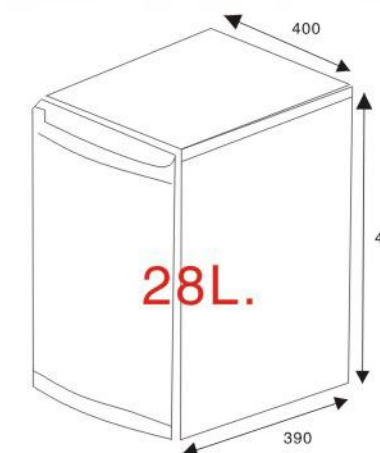

XC-28 Details

Cooling capacity (Litres)	28
Out size (mm)(W×D×H)	400x390x440
Power (Watt)	60
Voltage/frequency (V)(Hz)	220-240/50-60
Energy consumption (kwh/24h)	0.8
Refrigerant	NH3
Net weight (kg)	14
Loading capacity (20/40/40HQ)	260/540/675
Color	Optional
Lock	Optional
Door	Glass door/Solid door